

BMP-1 / BMP-1-S / BMP-3



Autweg 26
3911 TK Rhenen
The Netherlands
Phone +31-(0)317 398 787
Info@Romex.nl www.Romex.nl

- ✔ ESD Solutions
- ✔ Cleanroom Products
- ✔ Soldering Equipment
- ✔ Test & Measurement

Mechanical

Recommended Travel: .050 (1.27)
Full Travel: .062 (1.57)
Direction of Rotation: Counter clock wise
Scribed Diameter: .050 (1.27)
Special diameters available.

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	4.41 (125)	5.19 (147)

Electrical (Static Conditions)

Current Rating: 50 mA
Voltage Rating: 15VDC
Recommended Duty Cycle: 1 sec. On (min.)
5 sec. Off

Materials and Finishes

Plunger Tip: Carbide
Receptacle: Stainless Steel

Mounting

BMP-1 / BMP-1-S
Hole diameter: Ø .468 (11.89)
Suggested drill: 15/32 (in.) or 11.90 mm
BMP-3
Hole diameter: Ø .610 (15.50)
Suggested drill: 39/64 (in.) or 15.50 mm


Order Number

Board Marker: BMP-1
BMP-1-S
BMP-3
Spare Receptacle: BMR-1
BMR-3
Replacement Tip: BMT-1


Tools

Insertion tool for BMR-1: RIT-BMP
Extraction tool for BMR-1: EXT-BMP


BMP-1

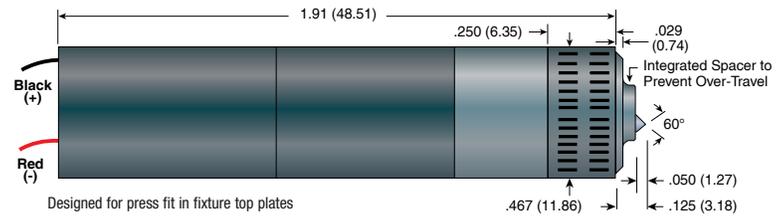

BMP-1-S

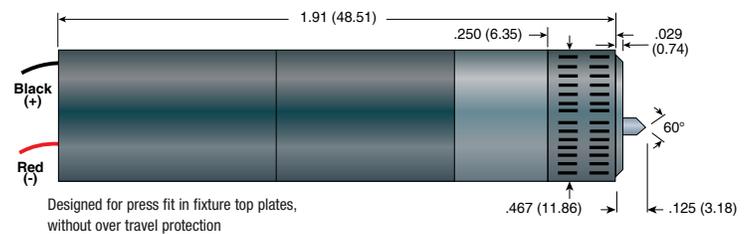

BMP-3

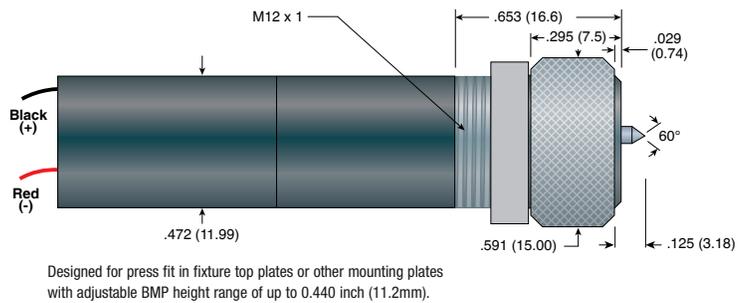

Applications

The BMP Board Marker Probe patented design is for installation on bare board or loaded board test fixtures. When your tester is equipped with the appropriate electronics and software, the BMP scribes a permanent .050" circle on every "passed" PCB or device tested. Boards that fail the test are not marked. The risk of human error is eliminated in PCB testing and sorting.

The unit requires less than .500" of fixture area. It is designed to mark board areas of bare glass (FR4), solder mask over glass or copper, or bare tinned copper.

The BMP includes a mounting receptacle and a motor/transmission assembly. It can be easily removed from the receptacle for use in other fixtures. Spare receptacles and tip replacement assemblies are available. The thread between receptacle and housing is 7/16-20 UNF.

Application Examples

- Bare Board Test
- Loaded Board Test
- Connector / Wire Harness

Benefits

- Hands Free Operation
- No Hazardous Consumables
- Durable
- > 50,000 Cycles before Tip Replacement
- Easy to Fixture

Features

- Permanent Mark
- Controllable Mark Intensity
- Driven by Test Program
- MicroGrain Carbide Tip
- Replaceable Tip








Autoweg 26
3911 TK Rhenen
The Netherlands
Phone +31-(0)317 398 787
Info@Romex.nl www.Romex.nl

- ESD Solutions
- Cleanroom Products
- Soldering Equipment
- Test & Measurement

BMP-4

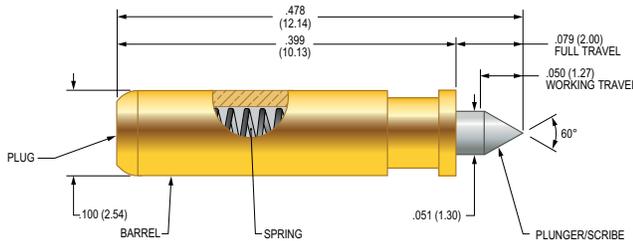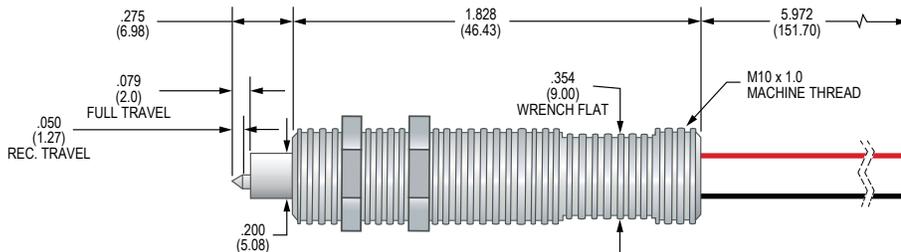

BMT-4

Mechanical

- Recommended Travel: .050 (1.27)
- Full Travel: .079 (2.00)
- Direction of Rotation: Counter clock wise
- Scribed Diameter: .050 (1.27)

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	2.43 (68.9)	5.0 (141.7)

Electrical (Static Conditions)

- Current Rating: 20 mA
- Voltage Rating: 12VDC
- Recommended Duty Cycle: 2 sec. On (min.)
3 sec. Off

Materials and Finishes

- Plunger Tip: Carbide
- Receptacle: Stainless Steel


Mounting

- Hole diameter: BMT-4
Ø .398 (10.1)
or M10 x 1.0 threaded hole

Order Number

- Board Marker: BMP-4
- Replacement Tip kit: BMT-4

Mounting Options

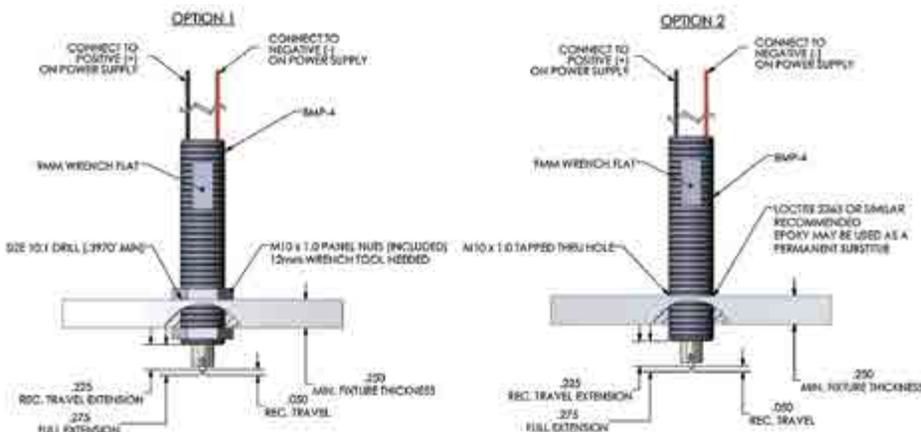

Dimensions in inches (millimeters). Specifications subject to change without notice. Consult factory for other temperature requirements, and applications below -40°C. Stocking Disclaimer: Stocking levels for part numbers listed in this catalog are subject to change. Availability is based on current levels of usage and demand.



BMP-5



Autoweg 26
3911 TK Rhenen
The Netherlands
Phone +31-(0)317 398 787
Info@Romex.nl www.Romex.nl

- ESD Solutions
- Cleanroom Products
- Soldering Equipment
- Test & Measurement

Mechanical

Recommended Travel: .050 (1.27)
Full Travel: .079 (2.00)
Direction of Rotation: Counter clock wise
Scribed Diameter: .050 (1.27)

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	2.43 (68.9)	5.0 (141.7)

Electrical (Static Conditions)

Current Rating: 20 mA
Voltage Rating: 12VDC
Recommended Duty Cycle: 2 sec. On (min.)
3 sec. Off

Materials and Finishes




Plunger Tip: Carbide
Receptacle: Stainless Steel

Mounting

Hole diameter: BMP-5
Ø .472 (12.1)
or M12 x 1.0 threaded hole

Order Number

Board Marker: BMP-5
Replacement Tip kit: BMT-4

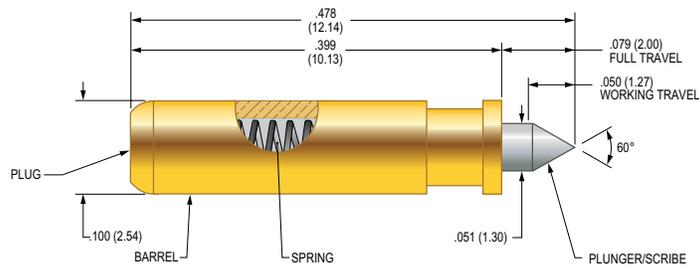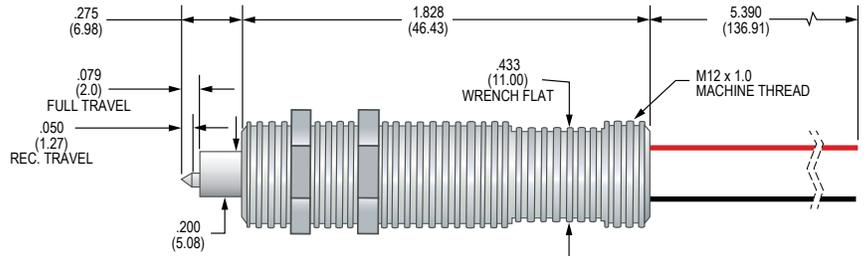

BMT-4

Mounting Options

